

Brick²

Design by Stéphane Joyeux








IP44
Class 2

Aluminium
Clear glass diffuser or black satin-finish PMMA Diffuser
Satin-finish polycarbonate bulb cover (model 1)
Satin-finish PMMA bulb cover (models 2 to 4)

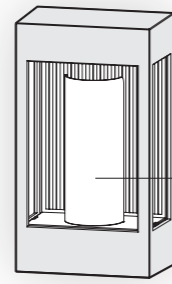

H 303 mm
W 169 mm
D 110 mm


«Easycap» quick-connect system p. 321

Removable bulb cover


Ventilation filter

SOURCE


E27 - 23W max Ø67 mm - H 175 mm max (model 1)
Ø60 mm - H 180 mm max (models 2 to 4 with bulb cover)
Ø80 mm - H 220 mm max (models 2 to 4 without bulb cover)



Model 1 with bulb cover
E27 (2450 lm)
Real light output - 1180 lm



Models 2 to 4 with bulb cover
E27 (1520 lm)
Real light output - 880 lm




Models 1 to 4 without bulb cover
E27 (2450 lm)
Real light output - 2350 lm

MODELS




H 303 . W 169 . D 110

1




H 500 . W 170 . D 100

2

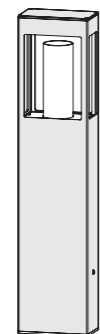

H 800 . W 170 . D 100

3

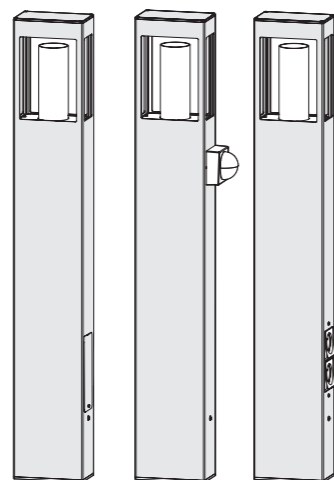

H 1100 . W 170 . D 100

4



REFERENCES

Replace ●●● with the colour code / replace (●) with the country's electrical plug code

MODELS	DIFFUSERS	E27	E27 + SENSOR	SOCKETS	DIFFUSERS	SPARE BULB COVERS
1	CLEAR GLASS	108 001 ●●●			165 013 609	165 071 611
	BLACK PMMA	108 004 ●●●			165 013 617	
2	CLEAR GLASS	108 002 ●●●			165 014 609	165 072 612
	BLACK PMMA	108 005 ●●●			165 014 617	
3	CLEAR GLASS	108 003 ●●●			165 014 609	165 072 612
	BLACK PMMA	108 006 ●●●			165 014 617	
4	CLEAR GLASS	108 007 ●●●	108 008 ●●●	108 009 ●●● (●)	165 014 609	165 072 612
	BLACK PMMA	108 010 ●●●	108 011 ●●●	108 012 ●●● (●)	165 014 617	

COLOURS CODES

Replace ●●● with the colour code

	VELVET BLACK 113		RAL 6025 FERN GREEN 109
	RAL 7021 BLACK GREY 107		DARK GREY 006
	RAL 7044 SILK GREY 105		SLATE GREY 059
	RAL 9010 PURE WHITE 101		WHITE 001
	RAL 5011 STEEL BLUE 065		BLUE 111
	RAL 3005 WINE RED 066		LIMESTONE 053
	RAL 3013 TOMATO RED 110		SANDSTONE 054
	RAL 3020 TRAFFIC RED 056		OLD RUSTIC 046
	RAL 2004 PURE ORANGE 014		RAW ALUMINIUM - MATT VARNISH 129 for model 1 only

Other colours on request


SOCKETS CODES

Except for French socket, replace (●) with country's socket code

	SCHUKO SOCKET SK type F		SWISS SOCKET CH type J
--	----------------------------	--	---------------------------

MOUNTING

Wiring entry points in grey - Fixing kit included



1

2 to 4